BP300 Datasheet

BACK PRESSURE REGULATOR

PRESSURE TECH

| • Gas | • Liquid | • Diaphragm | Piston | Self- Venting | Non- Venting | Max Rating: 35 bar (510 psi) | Control Range: 20 bar (290 psi) | Cv 0.1 |
|-------|----------|-------------|--------|---------------------------------------|-----------------|------------------------------|---------------------------------|--------|
| | | | | | | | | |
| | | | | | | | | |



INTRODUCING THE BP300...

The BP300 is an Inconel® X750 diaphragm-sensed back pressure regulator.

Its compact and simple design makes it ideal for general purpose applications and for systems that do not require accurate control of upstream pressure.

SPECIFICATION

| Max. Rating | 35 bar (510 psi) |
|-----------------------|----------------------------------|
| Control Range | Up to 20 bar (290 psi) |
| Design Proof Pressure | 150% max. working pressure |
| Seat Leakage | In accordance with ANSI/FCI 70-3 |
| Weight | 0.9kg (2lbs) |

* Pressure regulator rating may be limited by connection type, Cv and/or seat material

FEATURES AND BENEFITS

INCONEL® X750 DIAPHRAGM

For ultimate strength and reliability on clean or corrosive applications.

SUITABLE FOR 2 gas or liquid APPLICATIONS

Versatile usage across a range of media-types.

LOW FLOW 3 COEFFICIENT

> Minimal restriction of process media.

LIGHTWEIGHT & COMPACT DESIGN

Perfect for when installation space is restricted.

NOTE: Product availability and specifications contained herein are subject to change without notice. Consult local distributor or factory for potential revisions and/or service related issues. Pressure Tech Ltd support with product selection recommendations only - it is the users responsibility to ensure the product is suitable for their specific application requirements



DESIGNED AND BUILT IN THE UK

PRESSURE TECH LTD

Unit 24, Graphite Way, Hadfield, Glossop, Derbyshire, UK, SK13 1QH

T +44 (0)1457 899 307

E sales@pressure-tech.com W www.pressure-tech.com




STANDARD MATERIALS OF CONSTRUCTION

| PART | MATERIALS | | |
|-----------------|---------------------------------------|--|--|
| Body and Bonnet | AISI 316/316L Stainless Steel | | |
| Body and Bonnet | (UNS S31600/S31603) | | |
| Soft Seat | FKM/FPM | | |
| Diaphragm | Inconel [®] X750 | | |
| Handwheel | Nylon | | |
| O-Rings | FKM/FPM | | |
| Loading Spring | AISI 302 Stainless Steel (UNS S30200) | | |



DRAWINGS AND INSTALLATION DIMENSIONS

Dimensions shown for 1/4" NPT option - please contact the office for additional connections options.

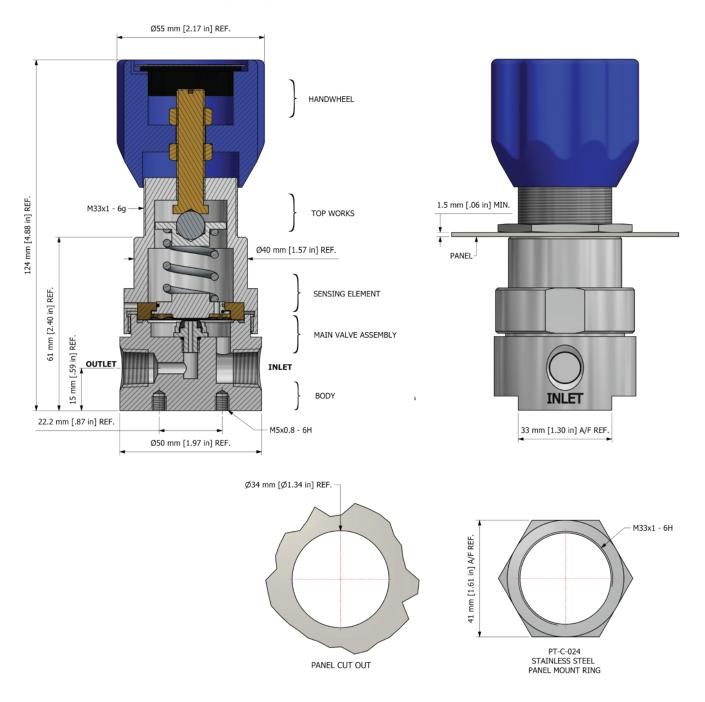

Note:

All gauge ports are 1/4" NPT as standard.

NOTE: Product availability and specifications contained herein are subject to change without notice. Consult local distributor or factory for potential revisions and/or service related issues. Pressure Tech Ltd support with product selection recommendations only - it is the users responsibility to ensure the product is suitable for their specific application requirements



DESIGNED AND BUILT IN THE UK

Unit 24, Graphite Way, Hadfield, Glossop, Derbyshire, UK, SK13 1QH

PRESSURE TECH LTD T +44 (0)1457 899 307

E sales@pressure-tech.com

W www.pressure-tech.com






FLOW CURVE

Please contact the office for further information.



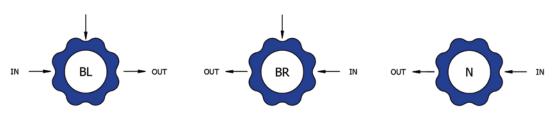

Note:

Additional porting configurations are available - please contact the office for further information.

NOTE: Product availability and specifications contained herein are subject to change without notice. Consult local distributor or factory for potential revisions and/or service related issues. Pressure Tech Ltd support with product selection recommendations only - it is the users responsibility to ensure the product is suitable for their specific application requirements.



PRESSURE TECH LTD Unit 24, Graphite Way, Hadfield, Glossop, Derbyshire, UK, SK13 1QH

T +44 (0)1457 899 307

E sales@pressure-tech.comW www.pressure-tech.com

PAGE:

BP300 Datasheet


BACK PRESSURE REGULATOR



| • Gas | • Liquid | Diaphragm | Piston | Self- Venting | Non- Venting | Max Rating: 35 bar (510 psi) | Control Range: 20 bar (290 psi) | Cv 0.1 |
|-------|----------|-------------------------------|--------|---------------------------------------|--------------------------------------|------------------------------|---------------------------------|--------|

ORDERING INFORMATION

To build a Pressure Tech part number, simply combine the characters identified below in sequence:

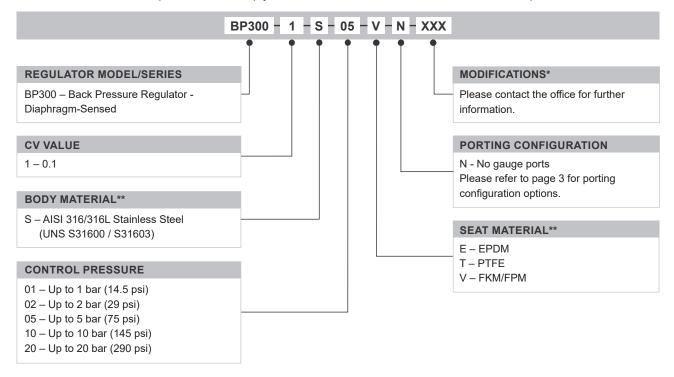

OPTIONAL EXTRAS

| | PART NUMBER | DESCRIPTION |
|---------------------|-------------|----------------------------------|
| Service Kit | SRK-BP300 | Various options available |
| Panel Mounting Ring | PT-C-024 | Stainless Steel panel mount ring |

Note:

Ancillary equipment also available

TRADEMARKS: Inconel® is a registered trademark of Inco Alloys International

Haldatec

* Where applicable ** Other materials may be available - please contact the office

NOTE: Product availability and specifications contained herein are subject to change without notice. Consult local distributor or factory for potential revisions and/or service related issues. Pressure Tech Ltd support with product selection recommendations only - it is the users responsibility to ensure the product is suitable for their specific application requirements.



Phone: +61 3 9872 5822 Email: sales@haldatec.com.au Website: www.haldatec.com.au

