


Heated Manifold

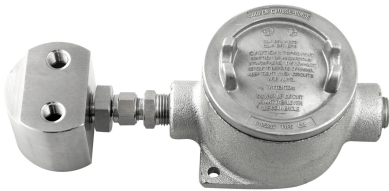

XHM-300

Features:

IECEX certified to Ex d IIC T3 Ta

Single 150W heater


316 Stainless Steel construction

Inlet to 30 Mpa (4,351 PSI)

Easy to wire circuit board with 115V or 230V supply

Fully serviceable design

Optional entry points for cable supply

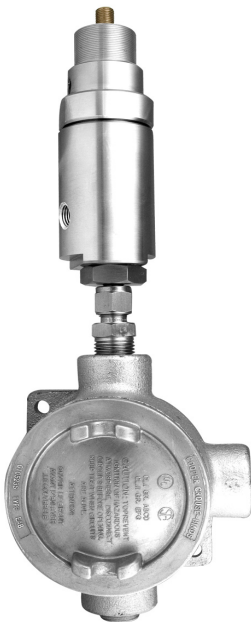

Single Stage Regulator

XHS-300

Features:

IECEX certified to Ex d IIC T3 Ta

316 Stainless steel construction

Flameproof

Single 100W heater

Side entry or inline heater

Inlet to 21 Mpa (3,045 PSI) outlet to 3.5 Mpa (500 PSI)

Removable sheath for easy removal of carbon deposits

Convolluted inconel diaphragm for extra strength and

Easy to wire circuit board with 115V or 230V supply

Flexibility at high temperatures

Fully Serviceable

Optional cable entry points

[Haldatec](http://www.haldatec.com.au)

Phone: +61-3-9872-5822 Fax: +61-3-9872-5129

E-mail: sales@haldatec.com.au Web Site: www.haldatec.com.au